

Viscosity Stabilizer and Anti-Gellant for Solvent-Base Coatings

Color Solutions

Chroma-Chem® Synermix® 7

General Information



Synermix 7 is a unique wetting agent which prevents drastic viscosity increases, gelling, or livering where these problems are caused by either vehicle polymerization or by gradual changes in the vehicle adsorption on pigment surfaces. Synermix 7 can also be used in the dispersion of iron oxides, carbon blacks, and very fine particle size silicas.

Key Benefits

Synermix 7 is an widely compatible additive designed to prevent gelling and improve pigment suspension in a form that is easy to incorporate into most paint systems with no flooding, floating, or flocculation. It will also help to increase mill throughput.

Applications

Synermix 7 is fully compatible with most solvent base vehicles, including medium-oil alkyds, short-oil alkyds, vinyl toluene alkyds, epoxy esters, oil-and alkyd-modified urethanes, epoxies, nitrocellulose and acrylics and chlorinated rubber.

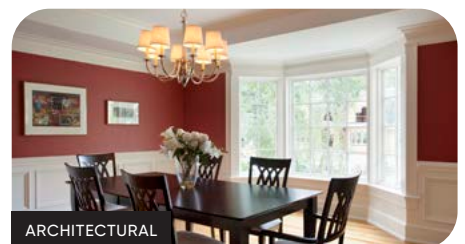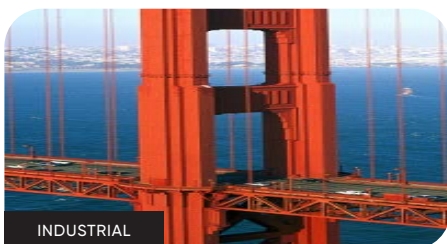

Physical Properties

Property	Value
Active Content	66%
Solvent	Xylene
Density, @ 20 deg C	0.90 g/cm ³
Weight per Gallon	7.5

Level of Usage

Synermix 7 may be used as a co-dispersing agent to improve the wetting properties variety of non-aqueous resin systems. It may be incorporated in the mill-base prior to addition of pigments.

Additions of 1 – 3% (by weight on total formulation) of Synermix 7 will provide optimum performance. Usage levels may vary in different paint systems. It is recommended that a ladder study be performed to determine optimal level.

Packaging

Synermix 7 is supplied in pails and drums. Please contact your local Vibrantz Technologies representative for the packaging available in your region.

Shelf Life

Synermix 7 should be stored out of direct sunlight at temperatures between 40° F/5° C and 130° F/50° C. Store away from excessive heat or open flame. Keep container closed when not in use

When kept in an original unopened container, it will remain stable for four years from the date of manufacture.

The information and recommendations contained herein are based on data we believe to be reliable and does not imply any warranty or performance guarantee, as conditions and methods of use of our products are beyond our control. The data herein is determined using Vibrantz's standard test methods. Hazard and safety information with respect to this product is available in the applicable SDS. Vibrantz will not be liable under any circumstance for consequential or incidental damages, including but not limited to, lost profits resulting from the use of our products